PROJECT REFERENCE DATA SHEET

Project Name ▶	Uranium Mine and Mill Site - Saskatchewan		
Client / Owner ▶	Demolition Client	***Year*** ▶	--
Design Cost ▶	--	***Contract Cost*** ▶	--

Description of Work:

Carvajal Structural Engineers Inc. (CSE) was retained to be the Demolition Specialist for the preparation of detailed decommissioning demolition guideline for various structures located in Saskatchewan.

The work required extensive abatement of the buildings with the associated safe access guidelines and the complete demolition of more than 30 building structures of various sizes. CSE prepared detailed demolition guidelines for the following larger structures:

- Production Buildings -> Acid Plants, Dock Warehouse, Geology Mine Dry, Head Frame, Maintenance Shops/Warehouse, Powerhouse.

- Site Facilities and Structures -> Acid Storage Tanks, Beach Brage, Docks, Freshwater Storage Tanks, Tailing Lines, Tank Frame, Utilidors, Wooden Storage Shacks, Sulphur Storage Warehouse, Concrete Mixing Plants, Mine Ventilation Buildings.

- Operations Buildings -> Office Buildings, Guest Houses, Main Food Preparation and Eating Facilities.

Detailed structural demolition guidelines for the Control Drop of the Head Frame were prepared since access to the structure was deemed unsafe.
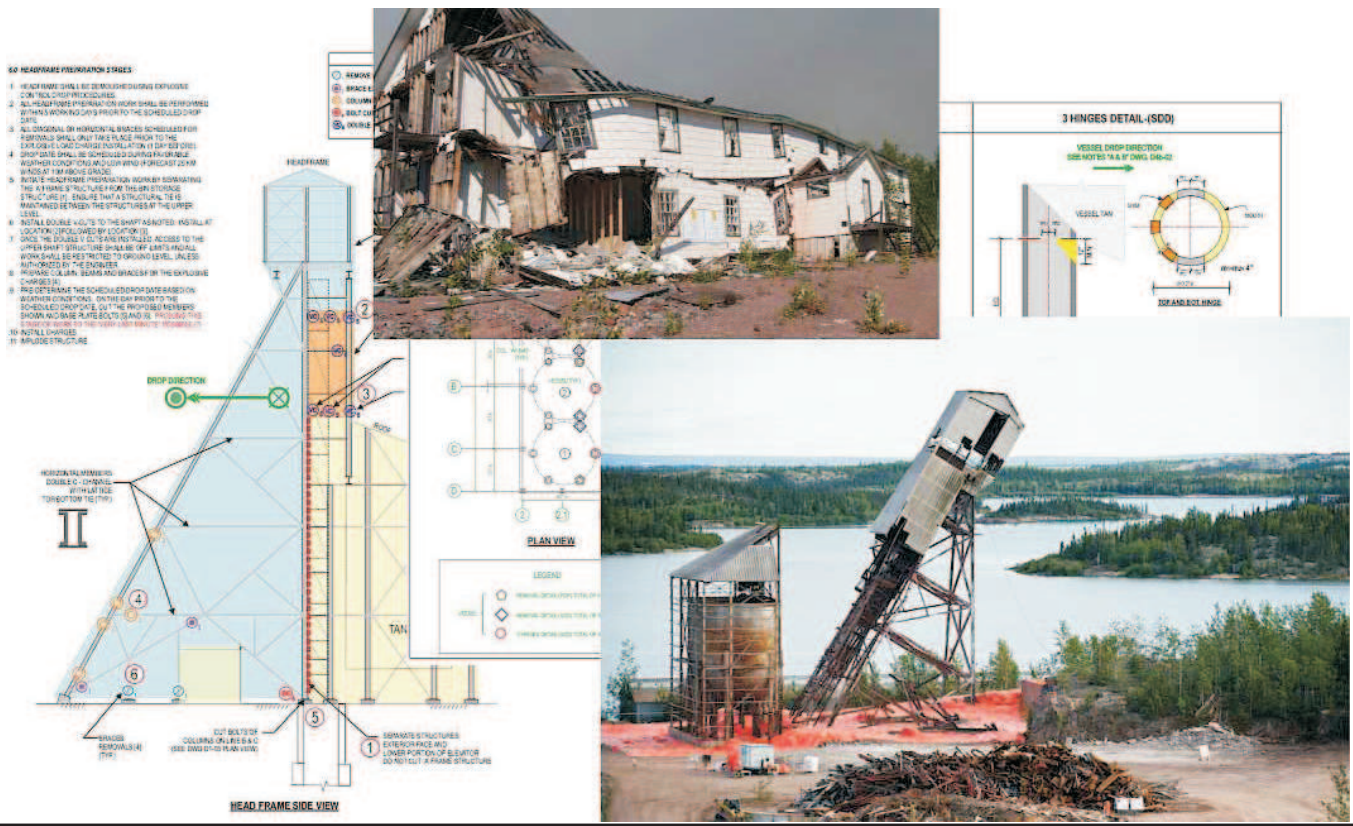
Figure/Photographs: